



SERIES F303

One-Piece Ball Valve Flange End

INTRODUCTION

The Series F303 is a direct-mount, one-piece reduced-bore flange ball valve engineered for reliable performance in industrial applications. Certified with API 607, it ensures robust safety in high-risk environments. Featuring a unique stem seal for enhanced durability and ATEX-approved anti-static components, the valve is designed for versatile use across a wide range of processes involving liquids, gases, and vapors.

TECHNICAL SUMMARY



SIZE RANGE	Reduced port	1/2" ~ 4"
PRESSURE RATING	Reduced port	1/2" ~ 6" : Class 150 1/2" ~ 4" : Class 300
END CONNECTIONS	Flanged	
VALVE TYPE	Reduced Bore	
BODY & END CAP MATERIAL (ASTM)	CF8M, CF3M, CF8, CF3, WCB, CN7M, CD3MN, CE3MN, CW12MW, 904L, LCC, Titanium Alloy (Gr. C-2)	
BODY & END CAP MATERIAL (EN)	1.4408, 1.4409, 1.4308, 1.4309, 1.0619, 1.4470	
SEAT MATERIAL	PTFE, RTFE, CTFE, TFM1600, MG1241, STFE, PEEK, Delrin, UHMWPE, PCTFE	
HANDLE TYPE	Flat (with / without SR Lock), T-Bar, Economical Stem Extension	
HANDLE MATERIAL	Flat & T-Bar - 304, 316	
V-PORT OPTION	Yes	
WITH ANTI-STATIC DEVICE OPTION	Yes	
OPERATION	Pneumatic or electric actuated	

STANDARD OF COMPLIANCE

MATERIAL CERTIFICATION	EN 10204-3.1
DESIGN	ASME B16.34 / EN12516-1 / EN 12516-3
FLANGED END CONNECTIONS	ASME B16.5 Class 150 & Class 300
PRESSURE TESTING	API 598
MOUNTING PAD	ISO 5211
FIRE SAFE	API 607
MARKING	ISO 5209
CE APPROVAL	2014 / 68 / EU Module H
QUALITY ASSURANCE	ISO 9001:2015


CONSTRUCTION-BILL OF MATERIAL

SERIES F303-10
1/2" ~ 2" Reduced port

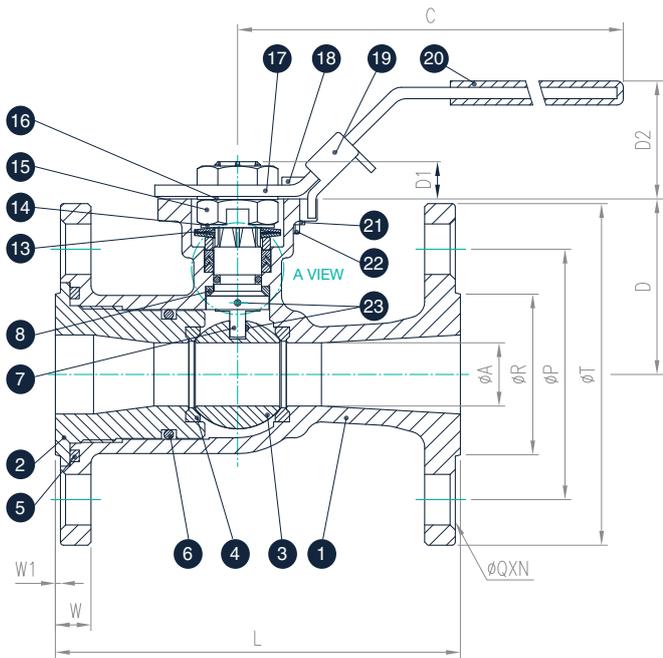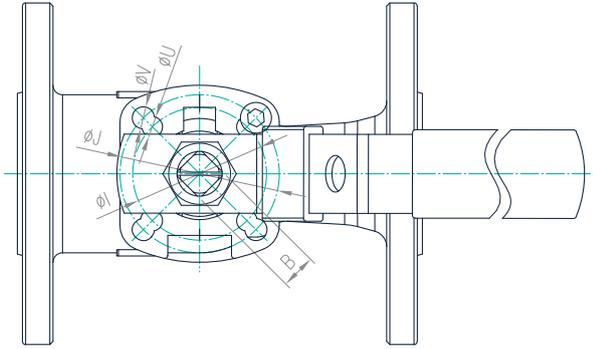

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	O-Ring	VITON	1
7	Stem	SS316	1
8	Thrust Washer	RTFE	1
9	O-Ring	VITON	1
10	Gland Packing	PTFE	*
11	Gland Packing	25% GLASS FIBER FILED+PTFE	1
12	Gland Bush	SS304	1
13	Belleville Washer	SS301	2
14	Stop Washer	SS304	1
15	Stem Nut	SS304	2
16	Stem Washer	SS304	1
17	Handle	SS304	1
18	Stop Pin	SS304	1
19	Locking Device	SS304	1
20	Handle Cover	VINYL	1
21	Washer	SS304	1
22	Pin Nut	SS304	1
23	Anti-static Device	SS316	2

1/2" ~ 1-1/2" (2pcs) , 2" (3pcs)

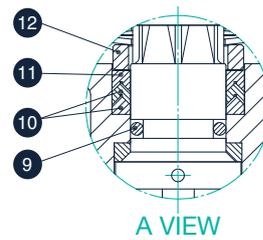


DIMENSIONS(mm)

SIZE	øA	B	C	D	D1	D2	øI	øJ	L	N	øP	øQ	øR	øT	W	W1	øU	øV	ISO5211
1/2"	12.7	11	165	46.7	9.4	36	42	50	108.3	4	60.5	16	35.1	88.9	11.2	1.6	6.5	7	FOR F04 / F05
3/4"	15	11	165	51.2	9.9	36	42	50	117.3	4	69.9	16	42.9	98.6	11.2	1.6	6.5	7	FOR F04 / F05
1"	20	11	165	55.5	9.9	36	42	50	127.1	4	79.2	16	50.8	108	11.2	1.6	6.5	7	FOR F04 / F05
1-1/2"	32	14	215	72.6	12.9	47	50	70	165.1	4	98.6	16	73.2	127	14.3	1.6	7.5	9	FOR F05 / F07
2"	38	17 / 19	262	89.1	18.1	55	70	102	178.3	4	120.7	19	91.9	152.4	15.9	1.6	10	12	FOR F07 / F10


CONSTRUCTION-BILL OF MATERIAL

SERIES F303-10
2-1/2" ~ 6" Reduced port

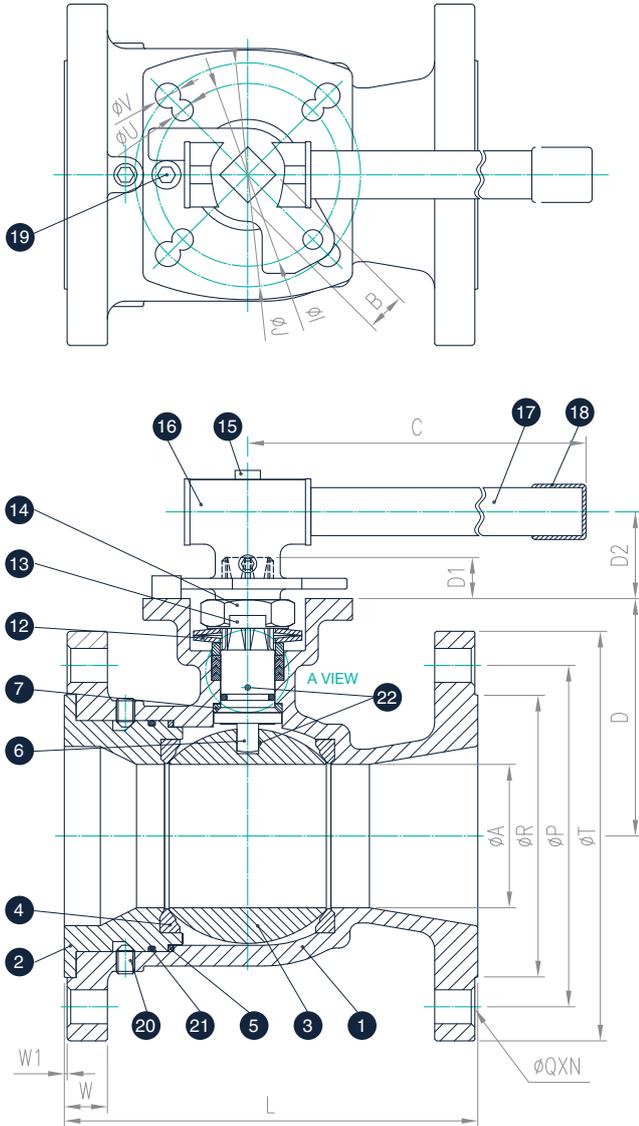

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	O-Ring	VITON	1
9	Gland Packing	PTFE	3
10	Gland Packing	25% GLASS FIBER FILED+PTFE	1
11	Gland Bush	SS304	1
12	Belleville Washer	SS301	2
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Handle Screw	SS304	2
16	Handle -A	SS304	1
17	Handle-B	SS304 / CARBON	1
18	Handle Cover	VINYL	1
19	Stop Pin	SS304	1
20	Screw	SS304	□
21	O-Ring	VITON	1
22	Anti-static Device	SS316	2

2-1/2" ~ 4" (4pcs) , 6" (8pcs)
3" ~ 4" Handle-B material is SS304
6" Handle-B material is CARBON

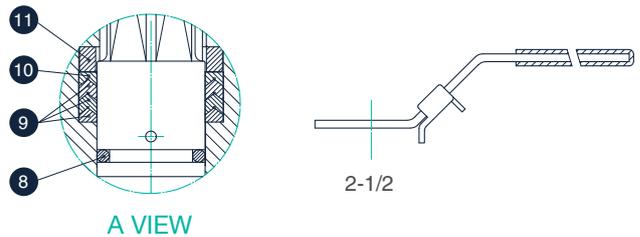


DIMENSIONS(mm)


SIZE	øA	B	C	D	D1	D2	øI	øJ	L	N	øP	øQ	øR	øT	W	W1	øU	øV	ISO5211
2-1/2"	50	17 / 19	262	96.6	19	55	70	102	190	4	139.7	19	104.6	177.8	17.6	1.6	10	12	FOR F07 / F10
3"	65	17 / 19	365	116	19	44.3	70	102	203.5	4	152.4	19	127	190.5	19	1.6	10	12	FOR F07 / F10
4"	80	22	365	132.5	23	48.4	102	125	228.6	8	190.5	19	157.2	228.6	23.9	1.6	12	14	FOR F10 / F12
6"	111	27	705	179.7	28.5	65	125	140	266.7	8	241.3	22.2	215.9	279.4	25.4	1.6	14	18	FOR F12 / F14

CONSTRUCTION-BILL OF MATERIAL

SERIES F303-20
3", 4" Reduced port

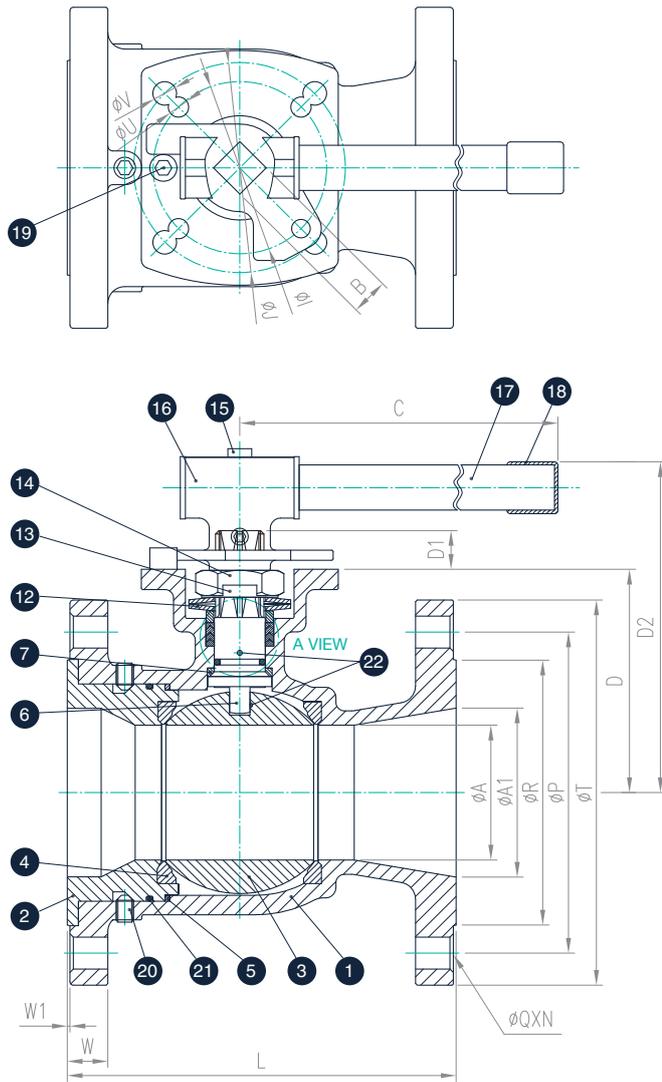

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316	1
4	Seat	RTFE	2
5	Joint Gasket	SPIRAL WOUND SS316 WITH GRAPHITE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	O-Ring	VITON	1
9	Gland Packing	PTFE	1
10	Gland Packing	25% GLASS FIBER FILED+PTFE	1
11	Gland Bush	SS304	1
12	Belleville Washer	SS301	2
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Handle Screw	SS304	2
16	Handle -A	SS304	1
17	Handle-B	SS304	1
18	Handle Cover	VINYL	1
19	Stop Pin	SS304	1
20	Screw	SS304	4
21	O-Ring	VITON	1
22	Anti-static Device	SS316	2



DIMENSIONS(mm)

SIZE	øA	øA1	B	C	D	D1	D2	øI	øJ	L	N	øP	øQ	øR	øT	W	W1	øU	øV	ISO5211
3"	65	80	17 / 19	365	116	19	176	70	102	282.4	8	168.2	22.2	127	209.6	28.5	1.6	10	12	FOR F07 / F10
4"	80	100	22	365	132.5	23	196	102	125	304.8	8	200.2	22.2	157.2	254	31.8	1.6	12	14	FOR F10 / F12


TECHNICAL DATA | Breakaway torque / Cv and Kv values / Weight

F303-10					
Size	Torque		Cv values	Kv values (M ³ /h)	Weight (Kg)
	N.m	lbs.in			
1/2"	10	89	9	8	1.6
3/4"	10	89	15	13	2.0
1"	14	124	42	36	2.6
1-1/2"	23	204	125	106	5.4
2"	34	301	165	140	8.1
2-1/2"	39	346	245	208	11.9
3"	59	523	350	298	16.0
4"	96	851	680	578	26.0
6"	212	1878	1020	867	45.1

F303-20					
Size	Torque		Cv values	Kv values (M ³ /h)	Weight (Kg)
	N.m	lbs.in			
1/2"	10	89	9	8	2.4
3/4"	10	89	15	13	3.7
1"	14	124	42	36	4.4
1-1/2"	23	204	125	106	8.2
2"	34	301	165	140	11.2
3"	59	523	350	298	24.2
4"	96	851	680	578	38.4

TECHNICAL DATA | Pressure - Temperature diagram | 1/2" ~ 6"

Series : F303-10 / F303-20
 Seat material : PTFE / RTFE

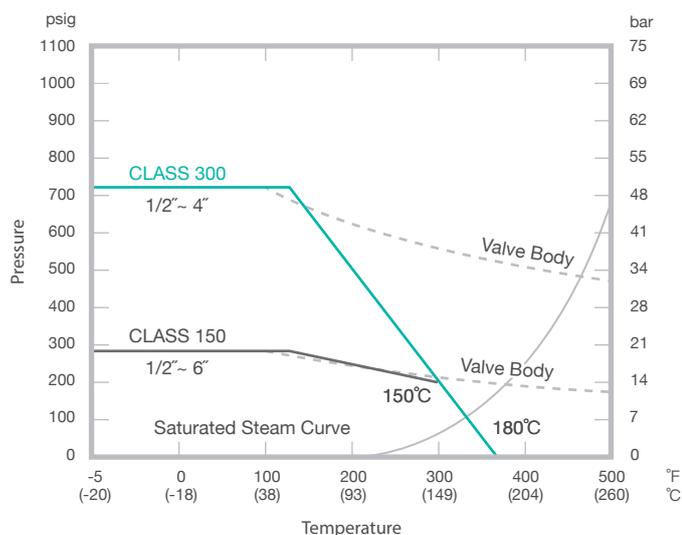

OPTIONAL ACCESSORIES

| Handle options



Oval handle



Economical stem extension



Flat (with / without Spring Return Lock)

| Accessories



TSM



TSM with Handle



Transworld Steel Enterprise Co., Ltd.

Tel +886 4 2271 6107 **Fax** +886 4 2271 6127

Address No. 34, Gongye 14th Rd., Dali Dist.,
Taichung City, 412038, Taiwan (R.O.C.)



Established in 1992
TAWD has dedicated over 30 years to
manufacturing premium ball valves

INNOVATION

INTEGRITY

STRICT SELECTION