



SERIES F501

Two-Piece Ball Valve Flange End



INTRODUCTION

The Series F501 is a two-piece, full-bore flange valve designed with a robust Double D stem for reliable operation in demanding industrial environments. Certified with API 607 7th edition fire-safe standards, it provides outstanding safety in high-risk applications. Featuring an ATEX-certified anti-static component for enhanced reliability and a precision-engineered stem seal system for durable, leak-proof performance, the Series F501 is a versatile and dependable choice for critical industrial operations.

TECHNICAL SUMMARY


SIZE RANGE	1/2" ~ 4"
PRESSURE RATING	Class 150, PN16/40
VALVE TYPE	Full Bore
BODY & END CAP MATERIAL (ASTM)	CF8M, CF3M, CF8, CF3, WCB, CN7M, CD3MN, CE3MN, CW12MW, 904L, LCC, Titanium Alloy (Gr. C-2)
BODY & END CAP MATERIAL (EN)	1.4408, 1.4409, 1.4308, 1.4309, 1.0619, 1.4470
SEAT MATERIAL	PTFE, RTFE, CTFE, TFM1600, MG1241, STFE, PEEK, Delrin, UHMWPE, PCTFE
HANDLE TYPE	Flat, Oval, T-Bar
V-PORT OPTION	Yes
OPERATION	Pneumatic or electric actuated

STANDARD OF COMPLIANCE

MATERIAL CERTIFICATION	EN 10204-3.1
DESIGN	ASME B16.34
FLANGED END CONNECTIONS	EN 1092-1 PN16 / PN40 ASME B16.5 Class 150
PRESSURE TESTING	API 598
MOUNTING PAD	ISO 5211
FIRE SAFE	API 607 8 th Edition
MARKING	ISO 5209
CE APPROVAL	2014 / 68 / EU Module H
QUALITY ASSURANCE	ISO 9001:2015


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-10 ASME CLASS 150 1/2"~ 2-1/2"

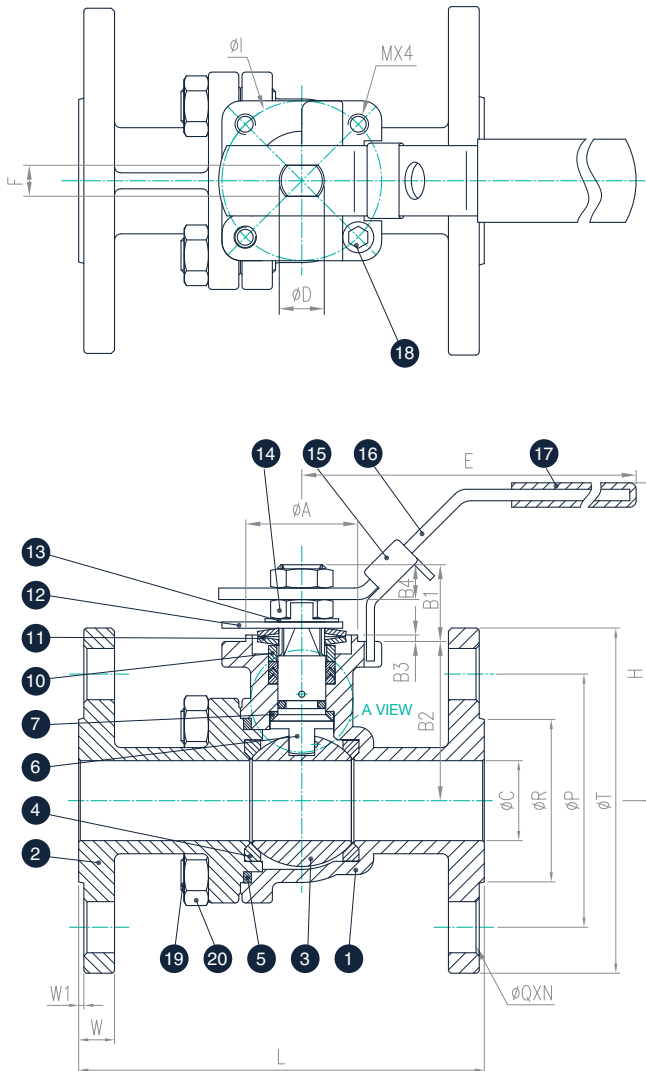

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	&
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Locking Device	SS304	1
16	Handle	SS304	1
17	Handle Cover	VINYL	1
18	Stop Pin	SS304	1
19	Bolt	SS304	*
20	Bolt nut	SS304	*
21	O-Ring	VITON	1
22	Anti-static Device	SS316	2

1-1/2"~ 2" (4pcs of balts and bolt nuts) , 2-1/2" (8pcs of balts and bolt nuts)
& 1/2"~ 1-1/4" (2pcs) , 1-1/2"~2-1/2" (3pcs)
Without O-ring design available




DIMENSIONS(mm)

SIZE	øA	B1	B2	B3	B4	øC	øD	E	F	H	øI	L	M	N	øP	øQ	øR	øT	W	W1	ISO5211
1/2"	30	23	34.5	1	9.2	15	11.1	170	8	80	42	108.3	108.3	4	60.5	16	35.1	88.9	11.2	1.6	FOR F04
3/4"	30	23	42	1	10.2	20	11.1	170	8	87	42	117.3	117.3	4	69.9	16	42.9	98.6	11.2	1.6	FOR F04
1"	35	23.5	49.8	2	8.1	25	14.3	207	9.7	103	50	127.1	127.1	4	79.2	16	50.8	108	11.2	1.6	FOR F05
1-1/4"	35	23.5	55	2	8.1	32	14.3	207	9.7	108	50	139.7	139.7	4	88.9	16	63.5	117.3	12.7	1.6	FOR F05
1-1/2"	55	34.8	78.3	2	14.8	38	19	261	12	153	70	165.1	165.1	4	98.6	16	73.2	127	14.3	1.6	FOR F07
2"	55	34.8	86.4	2	14.8	50	19	261	12	162	70	178.3	178.3	4	120.7	19	91.9	152.4	15.9	1.6	FOR F07
2-1/2"	55	34.8	97.4	2	14.8	65	19	261	12	173	70	190	190	4	139.7	19	104.6	177.8	17.6	1.6	FOR F07


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-10 ASME CLASS 150 3"~4"

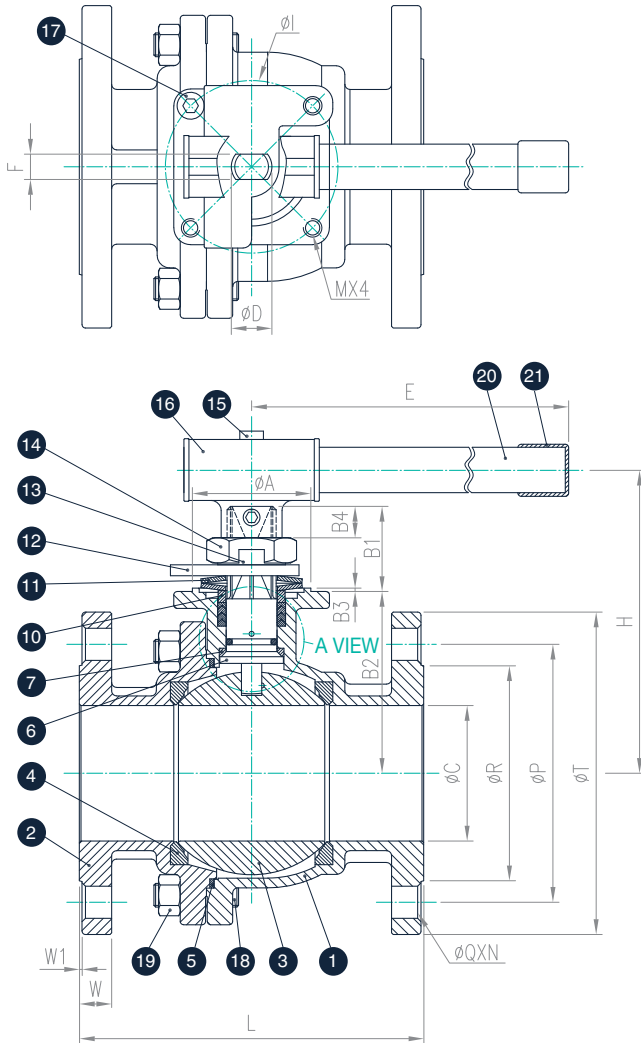

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	CF8M	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	3
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Handle Screw	SS304	2
16	Handle-A	SS304	1
17	Stop Pin	SS304	1
18	Bolt	SS304	8
19	Bolt nut	SS304	8
20	Handle-B	SS304	1
21	Handle Cover	VINYL	1
22	O-Ring	VITON	1
23	Anti-static Device	SS316	2

Without O-ring design available




A VIEW

DIMENSIONS(mm)

SIZE	øA	B1	B2	B3	B4	øC	øD	E	F	H	øI	L	M	N	øP	øQ	øR	øT	W	W1	ISO5211
3"	70	46	107.4	2	23.5	80	24	365	15	174.8	102	203.5	M10(3/8"-16UNC)	4	152.4	19	127	190.5	19	1.6	FOR F10
4"	70	46	122.4	2	23.5	100	24	365	15	189.9	102	228.6	M10(3/8"-16UNC)	8	190.5	19	157.2	228.6	23.9	1.6	FOR F10


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-40 PN16 1/2"~ 2-1/2"

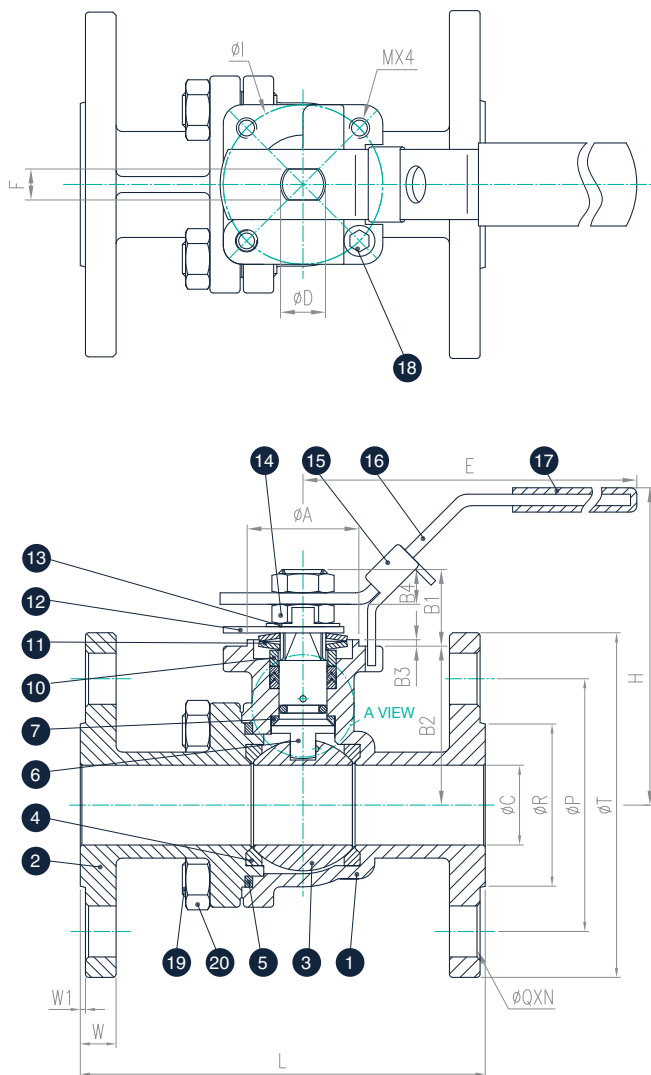

NO.	Parts	Material	Qty
1	Body	1.4408/1.0619	1
2	End cap	1.4408/1.0619	1
3	Ball	SS316/1.4408	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	&
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	2
15	Locking Device	SS304	1
16	Handle	SS304	1
17	Handle Cover	VINYL	1
18	Stop Pin	SS304	1
19	Bolt	SS304	*
20	Bolt nut	SS304	*
21	O-Ring	VITON	1
22	Anti-static Device	SS316	2

1-1/2"~ 2" (4pcs of balts and bolt nuts) , 2-1/2" (8pcs of balts and bolt nuts)
& 1/2"~ 1-1/4" (2pcs) , 1-1/2"~2-1/2" (3pcs)
Without O-ring design available




DIMENSIONS(mm)

SIZE	øA	B1	B2	B3	B4	øC	øD	E	F	H	øI	L		M	N	øP	øQ	øR	øT	W	W1	ISO5211
												F4	F1									
1/2"	30	23	34.5	1	9.2	15	11.1	170	8	80	42	115	130	M5	4	65	14	45	95	16	2	FOR F04
3/4"	30	23	42.5	1	10.2	20	11.1	170	8	87	42	120	150	M5	4	75	14	58	105	18	2	FOR F04
1"	35	23.5	50	2	8.1	25	14.3	207	9.7	103	50	125	160	M6	4	85	14	68	115	18	2	FOR F05
1-1/4"	35	23.5	54.7	2	8.1	32	14.3	207	9.7	108	50	130	180	M6	4	100	18	78	140	18	2	FOR F05
1-1/2"	55	34.8	78	2	14.8	38	19	261	12	153	70	140	200	M8	4	110	18	88	150	18	3	FOR F07
2"	55	34.8	86.7	2	14.8	50	19	261	12	162	70	150	230	M8	4	125	18	102	165	18	3	FOR F07
2-1/2"	55	34.8	98	2	14.8	65	19	261	12	173	70	170	290	M8	4	145	18	122	185	18	3	FOR F07


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-40 PN16 3"~4"

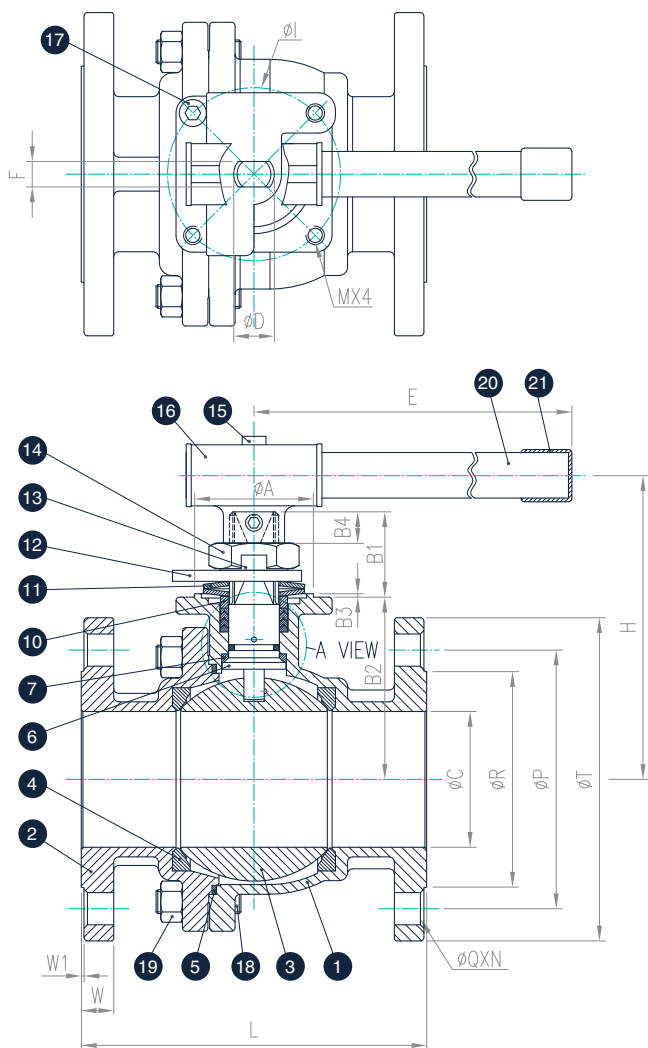

NO.	Parts	Material	Qty
1	Body	1.4408/1.0619	1
2	End cap	1.4408/1.0619	1
3	Ball	SS316/1.4408	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	3
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Handle Screw	SS304	2
16	Handle-A	SS304	1
17	Stop Pin	SS304	1
18	Bolt	SS304	8
19	Bolt nut	SS304	8
20	Handle-B	SS304	1
21	Handle Cover	VINYL	1
22	O-Ring	VITON	1
23	Anti-static Device	SS316	2

Without O-ring design available




A VIEW

DIMENSIONS(mm)

SIZE	øA	B1	B2	B3	B4	øC	øD	E	F	H	øI	L		M	N	øP	øQ	øR	øT	W	W1	ISO5211
												F4	F1									
3"	70	46	108	2	23.5	80	24	365	15	175.4	102	180	310	M10	8	160	18	138	200	20	3	FOR F10
4"	70	46	123	2	23.5	100	24	365	15	190.5	102	190	350	M10	8	180	18	158	220	20	3	FOR F10


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-60 PN40 1/2"~ 2-1/2"

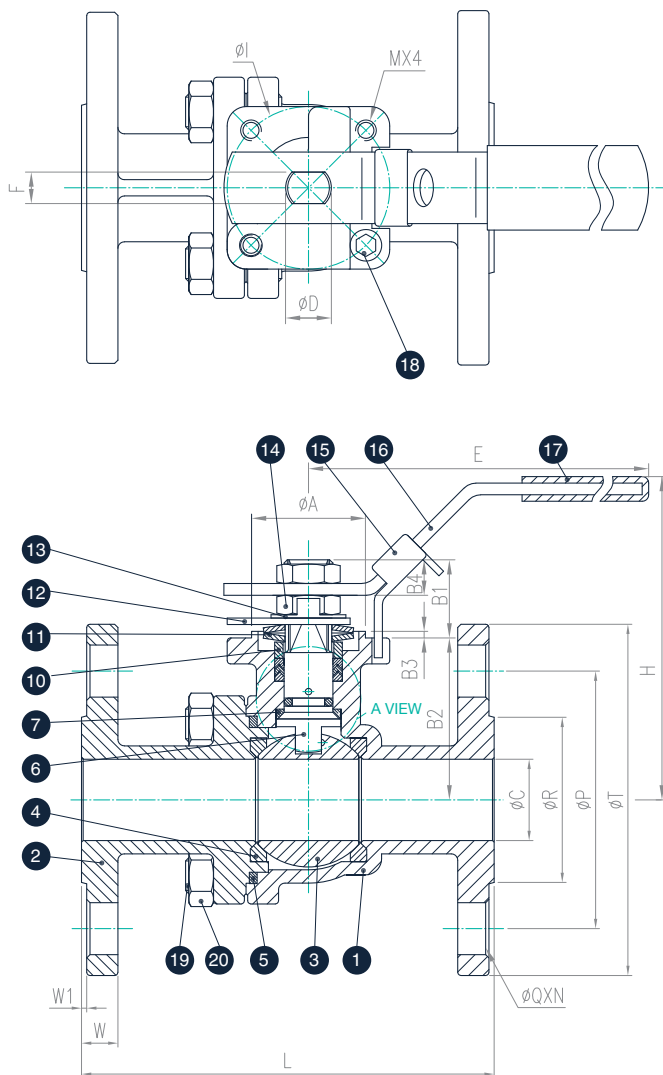

NO.	Parts	Material	Qty
1	Body	1.4408/1.0619	1
2	End cap	1.4408/1.0619	1
3	Ball	SS316/1.4408	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	&
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	2
15	Locking Device	SS304	1
16	Handle	SS304	1
17	Handle Cover	VINYL	1
18	Stop Pin	SS304	1
19	Bolt	SS304	*
20	Bolt nut	SS304	*
21	O-Ring	VITON	1
22	Anti-static Device	SS316	2

1/2"~ 2" (4pcs of balts and bolt nuts) , 2-1/2" (8pcs of balts and bolt nuts)
& 1/2"~ 1-1/4" (2pcs) , 1-1/2"~2-1/2" (3pcs)
Without O-ring design available




DIMENSIONS(mm)

SIZE	ϕA	B1	B2	B3	B4	ϕC	ϕD	E	F	H	ϕI	L		M	N	ϕP	ϕQ	ϕR	ϕT	W	W1	ISO5211
												F4	F1									
1/2"	30	23	34.5	1	9.2	15	11.1	170	8	80	42	115	130	M5	4	65	14	45	95	16	2	FOR F04
3/4"	30	23	42.5	1	10.2	20	11.1	170	8	87	42	120	150	M5	4	75	14	58	105	18	2	FOR F04
1"	35	23.5	50	2	8.1	25	14.3	207	9.7	103	50	125	160	M6	4	85	14	68	115	18	2	FOR F05
1-1/4"	35	23.5	54.7	2	8.1	32	14.3	207	9.7	108	50	130	180	M6	4	100	18	78	140	18	2	FOR F05
1-1/2"	55	34.8	78	2	14.8	38	19	261	12	153	70	140	200	M8	4	110	18	88	150	18	3	FOR F07
2"	55	34.8	86.7	2	14.8	50	19	261	12	162	70	150	230	M8	4	125	18	102	165	20	3	FOR F07
2-1/2"	55	34.8	98	2	14.8	65	19	261	12	173	70	170	290	M8	8	145	18	122	185	22	3	FOR F07


CONSTRUCTION-BILL OF MATERIAL

SERIES F501-60 PN40 3"~4"

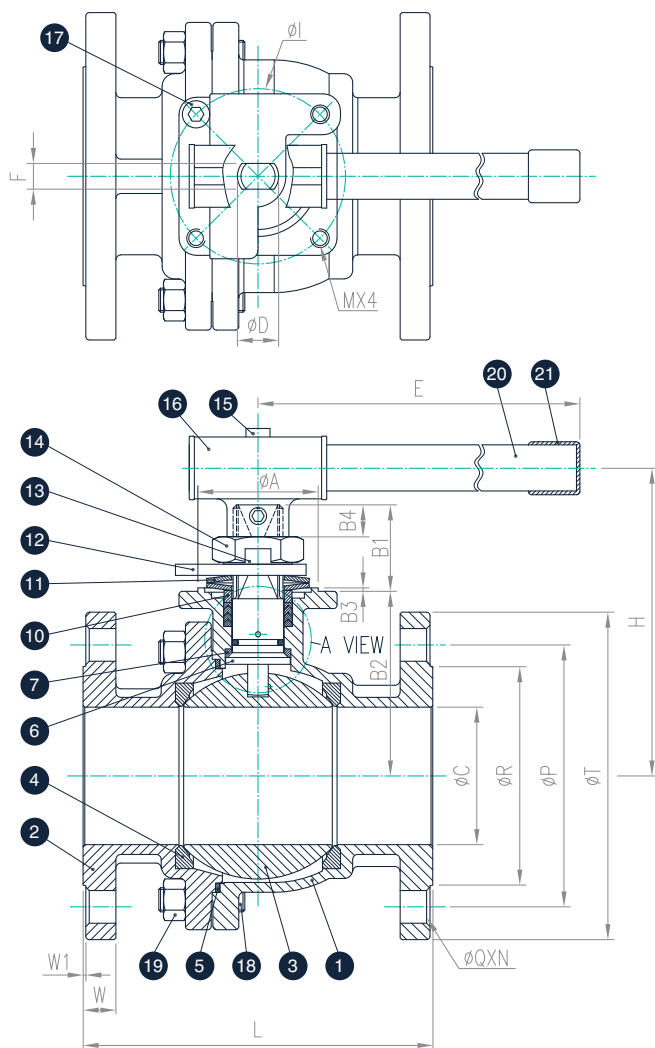

NO.	Parts	Material	Qty
1	Body	1.4408/1.0619	1
2	End cap	1.4408/1.0619	1
3	Ball	SS316/1.4408	1
4	Seat	RTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	3
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Locking Plate	SS304	1
13	Stop Washer	SS304	1
14	Stem Nut	SS304	1
15	Handle Screw	SS304	2
16	Handle-A	SS304	1
17	Stop Pin	SS304	1
18	Bolt	SS304	8
19	Bolt nut	SS304	8
20	Handle-B	SS304	1
21	Handle Cover	VINYL	1
22	O-Ring	VITON	1
23	Anti-static Device	SS316	2

Without O-ring design available



DIMENSIONS(mm)


SIZE	øA	B1	B2	B3	B4	øC	øD	E	F	H	øI	L		M	N	øP	øQ	øR	øT	W	W1	ISO5211
												F4	F1									
3"	70	46	108	2	23.5	80	24	365	15	175.4	102	180	310	M10	8	160	18	138	200	24	3	FOR F10
4"	70	46	123	2	23.5	100	24	365	15	190.5	102	190	350	M10	8	190	22	162.6	235	24	3	FOR F10

TECHNICAL DATA | Breakaway torque / Cv and Kv values / Weight


Size	Torque		Cv values	Kv values (M ³ /h)	Weight (Kg)		
	N.m	lbs.in			F501-10	F501-40	F501-60
1/2"	9	80	15	13	1.7	2.3	2.3
3/4"	13	115	40	34	2.2	3.1	3.1
1"	14	124	70	60	3.2	4.2	4.2
1-1/4"	22	195	110	94	4	5.6	5.6
1-1/2"	26	230	250	213	6.3	7.7	7.7
2"	35	310	430	366	9.3	9.5	10.2
2-1/2"	53	470	700	595	14.1	14	15
3"	78	691	1100	935	19.3	20.3	20.3
4"	94	833	2000	1700	31	30	30

TECHNICAL DATA | Pressure - Temperature diagram | 1/2" ~ 4"

Seat material : PTFE / RTFE

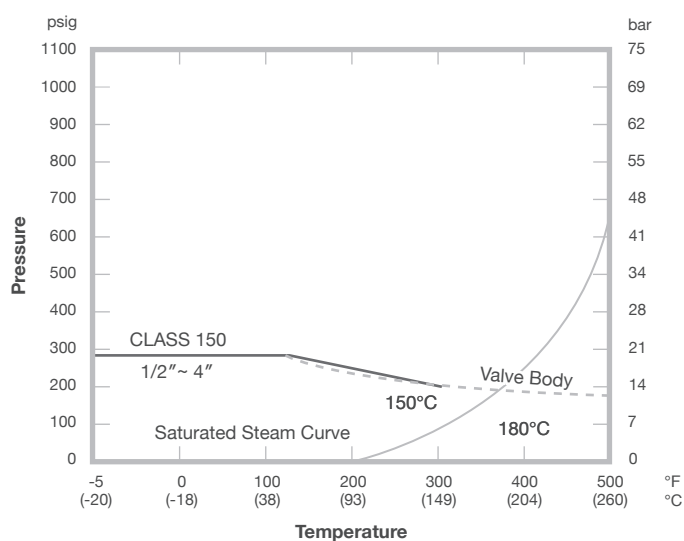

Seat material : PTFE / RTFE

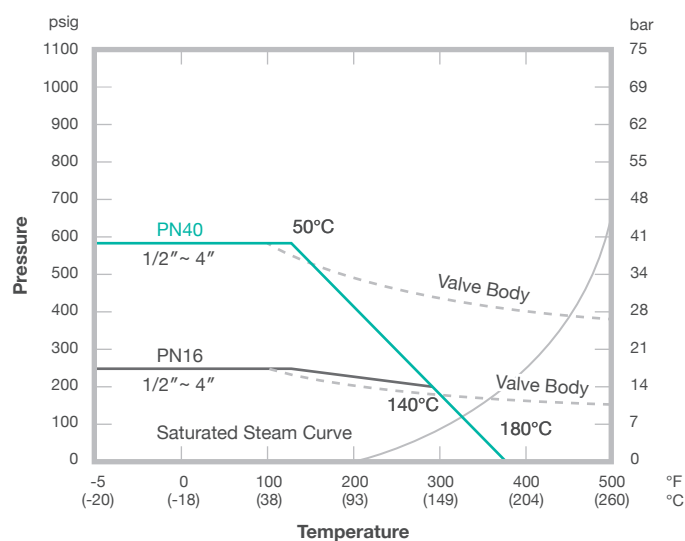

OPTIONAL ACCESSORIES

| Handle Options



Oval Handle



Spring Return Sliding Lock



Economical Stem Extension






T-Bar Handle



S.S Investment Casting Handle

| V-Port Ball



| Accessories



TSM



TSM with Handle



Actuator



Transworld Steel Enterprise Co., Ltd.

Tel +886 4 2271 6107 **Fax** +886 4 2271 6127

Address No. 34, Gongye 14th Rd., Dali Dist.,
Taichung City, 412038, Taiwan (R.O.C.)



Established in 1992
TAWD has dedicated over 30 years to
manufacturing premium ball valves

INNOVATION

INTEGRITY

STRICT SELECTION