



SERIES F301

One-Piece Ball Valve Flange End

INTRODUCTION

The Series F301 is a direct-mount, wafer-pattern ball valve offering exceptional performance in industrial and chemical environments, including hazardous conditions. It features a compact one-piece design with LUG flanges and a patented stem seal for extended reliability. Equipped with ATEX-approved anti-static components, the valve is designed for versatile use in applications involving liquids, gases, and vapors.

TECHNICAL SUMMARY


SIZE RANGE	NPS 1/2 to 6 (DN 15 to 150)
PRESSURE RATING	CLASS 150 / PN16, PN40
VALVE TYPE	Full Bore
BODY & END CAP MATERIAL (ASTM)	CF8M, CF3M, CF8, CF3, WCB
BODY & END CAP MATERIAL (EN)	1.4408, 1.4409, 1.4308, 1.4309, 1.0619
SEAT MATERIAL	PTFE, RTFE, CTFE, TFM1600, MG1241, STFE, PEEK, Delrin, UHMWPE, PCTFE
HANDLE TYPE	Flat (with / without SR Lock), T-Bar, Economical Stem Extension
HANDLE MATERIAL	Flat & T-Bar - 304, 316
V-PORT OPTION	Yes
WITH ANTI-STATIC DEVICE OPTION	Yes

STANDARD OF COMPLIANCE

MATERIAL CERTIFICATION	EN 10204-3.1
DESIGN	ASME B16.34 / EN12516-1 / EN 12516-3 EN 12516-1
FLANGED END CONNECTIONS	ASME B16.5 EN 1092-1
PRESSURE TESTING	API 598 EN 12266-1
MOUNTING PAD	ISO 5211
FIRE SAFE	API 607 ISO 10497
MARKING	ISO 5209
CE APPROVAL	2014 / 68 / EU Module H
QUALITY ASSURANCE	ISO 9001


CONSTRUCTION-BILL OF MATERIAL

SERIES F301-10
PN 16
1/2" ~ 3"

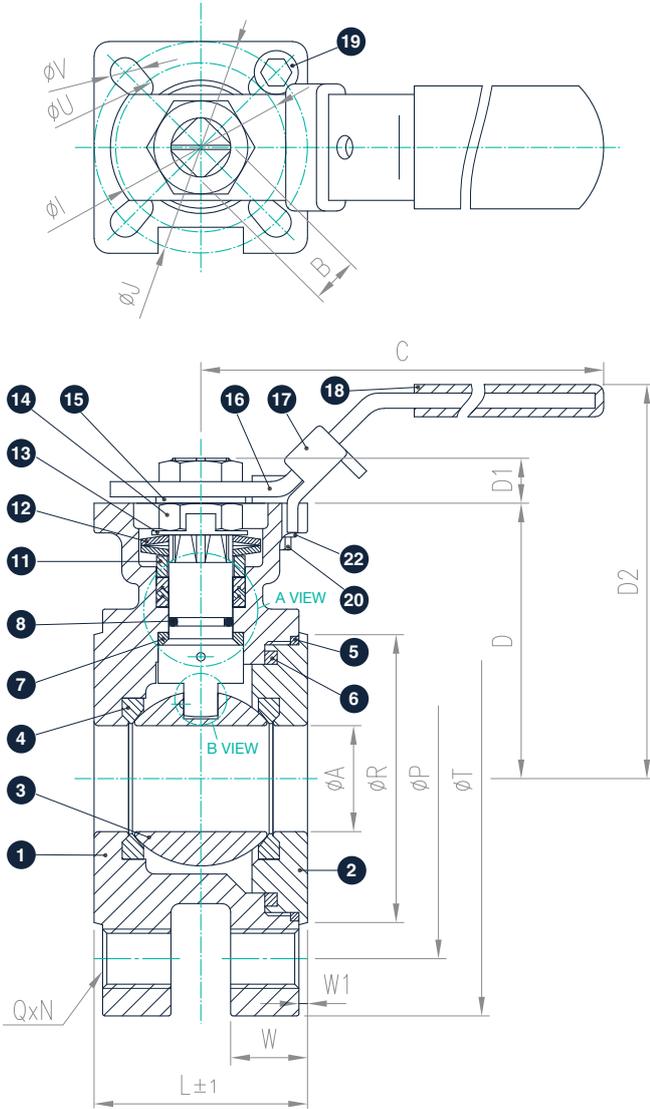

NO.	Parts	Material	Qty
1	Body	1.4408 / 1.0619	1
2	End Cap	4.4408 / 1.0619	1
3	Ball	SS316 / 1.4408	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	1
6	Joint Gasket	PTFE	1
7	Thrust Washer	RTFE	1
8	Stem	SS316	1
9	Gland Packing	PTFE	*
10	Gland Packing	25% GLASS FIBER FILED+PTFE	1
11	Gland Bush	SS304	1
12	Belleville Washer	SS301	2
13	Stop Washer	SS304	1
14	Stem Nut	SS304	2
15	Stem Washer	SS304	1
16	Handle	SS304	1
17	Locking Device	SS304	1
18	Handle Cover	PLASTIC	1
19	Stop Pin	SS304	1
20	Pin Nut	SS304	1
21	O-Ring	VITON	1
22	Washer	SS304	1
23	Anti-static Device	SS316	2

1/2" ~ 2" (2pcs) , 2-1/2" ~ 3" (3pcs)

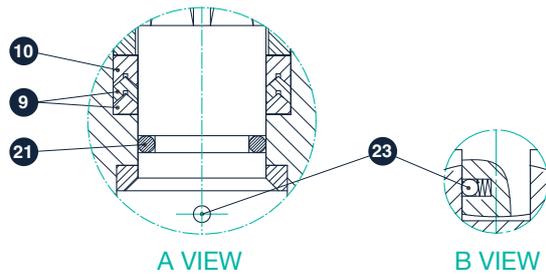


DIMENSIONS(mm)


SIZE	ϕA	B	C	D	D1	D2	ϕI	ϕJ	L	N	ϕP	Q	ϕR	ϕT	W	W1	ϕU	ϕV	ISO5211
1/2"	15	9	139	48.7	7	85	36	42	40.8	4	65	M12	45	82	16	2	6	6	FOR F03 / F04
3/4"	20	9	139	53.7	8	90	36	42	44	4	75	M12	58	98.6	18	2	6	6	FOR F03 / F04
1"	25	11	165	65	12	104	42	50	50	4	85	M12	68	115	18	2	6	7	FOR F04 / F05
1-1/4"	32	11	165	77	11.3	116	42	50	60	4	100	M16	78	140	18	2	6	7	FOR F04 / F05
1-1/2"	38	14	215	85.5	15.5	135	50	70	65	4	110	M16	88	150	18	3	7.5	9	FOR F05 / F07
2"	50	14	215	93	16	142	50	70	80	4	125	M16	102	165	20	3	7.5	9	FOR F05 / F07
2-1/2"	65	17	263	109.7	15.8	168	70	102	110	4	145	M16	122	185	22	3	10	12	FOR F07 / F10
3"	80	17	313	119.5	16	178	70	102	120	8	160	M16	138	200	24	3	10	12	FOR F07 / F10

CONSTRUCTION-BILL OF MATERIAL

SERIES F301-10
PN 16
4"

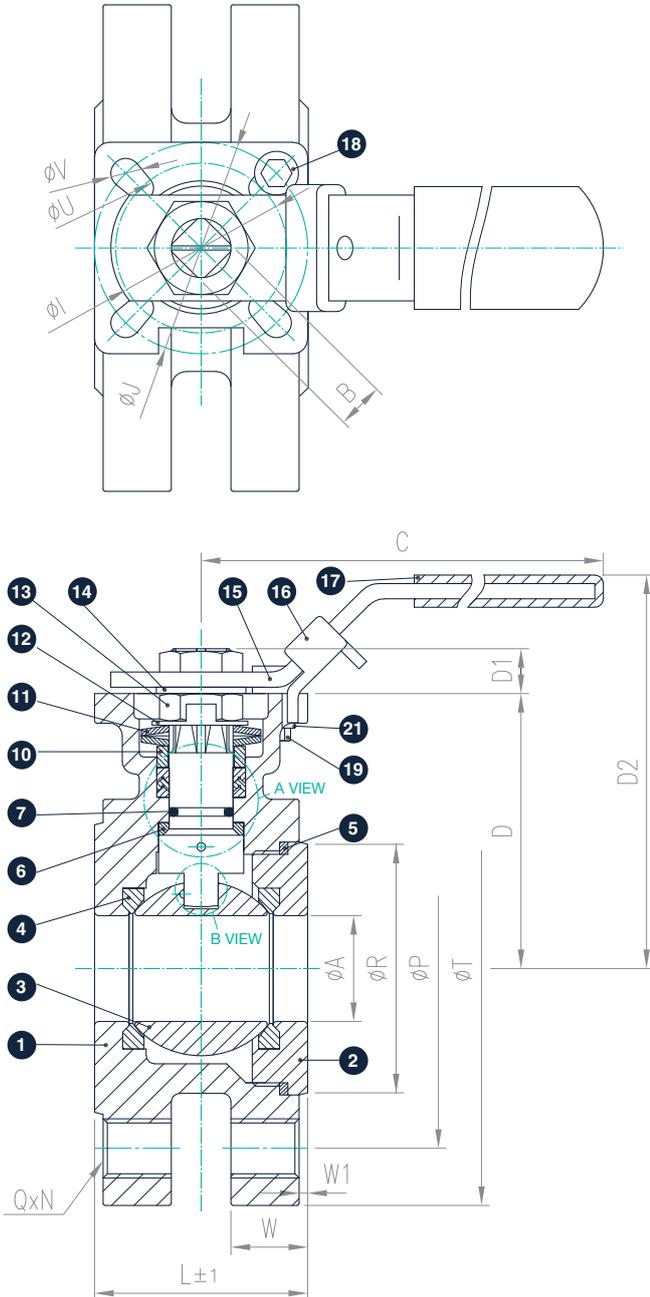

NO.	Parts	Material	Qty
1	Body	1.4408 / 1.0619	1
2	End Cap	4.4408 / 1.0619	1
3	Ball	SS316 / 1.4408	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	1
6	Thrust Washer	RTFE	1
7	Stem	SS316	1
8	Gland Packing	PTFE	3
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Stop Washer	SS304	1
13	Stem Nut	SS304	2
14	Stem Washer	SS304	1
15	Handle	SS304	1
16	Locking Device	SS304	1
17	Handle Cover	PLASTIC	1
18	Stop Pin	SS304	1
19	Pin Nut	SS304	1
20	O-Ring	VITON	1
21	Washer	SS304	1
22	Anti-static Device	SS316	2

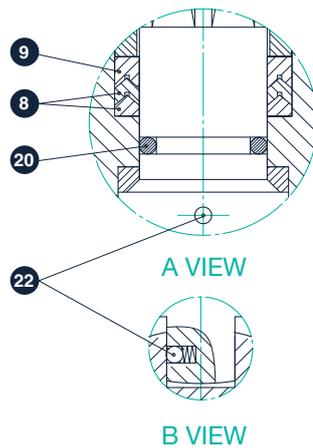


DIMENSIONS(mm)


SIZE	φA	B	C	D	D1	D2	φI	φJ	L	N	φP	Q	φR	φT	W	W1	φU	φV	ISO5211
4"	100	17	344	131.7	17.8	190	70	102	150	8	180	M16	158	220	20	3	10	12	FOR F07 / F10

CONSTRUCTION-BILL OF MATERIAL

SERIES F301-20
PN 40
1/2" ~ 3"

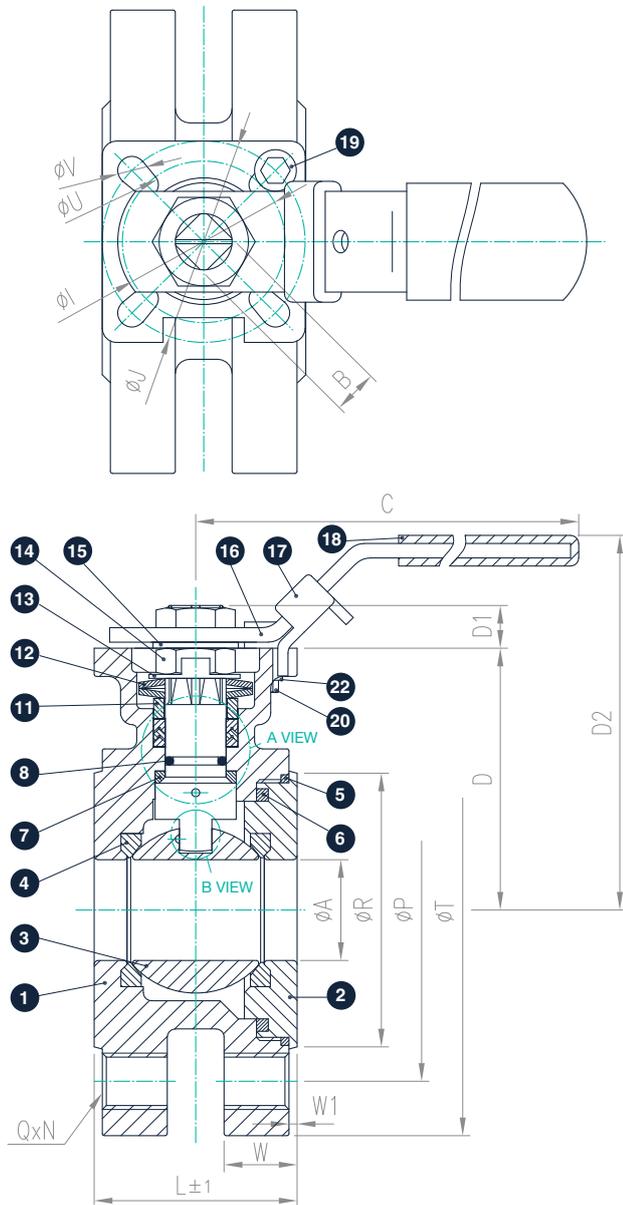

NO.	Parts	Material	Qty
1	Body	1.4408 / 1.0619	1
2	End Cap	4.4408 / 1.0619	1
3	Ball	SS316 / 1.4408	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	1
6	Joint Gasket	PTFE	1
7	Thrust Washer	RTFE	1
8	Stem	SS316	1
9	Gland Packing	PTFE	*
10	Gland Packing	25% GLASS FIBER FILED+PTFE	1
11	Gland Bush	SS304	1
12	Belleville Washer	SS301	2
13	Stop Washer	SS304	1
14	Stem Nut	SS304	2
15	Stem Washer	SS304	1
16	Handle	SS304	1
17	Locking Device	SS304	1
18	Handle Cover	PLASTIC	1
19	Stop Pin	SS304	1
20	Pin Nut	SS304	1
21	O-Ring	VITON	1
22	Washer	SS304	1
23	Anti-static Device	SS316	2


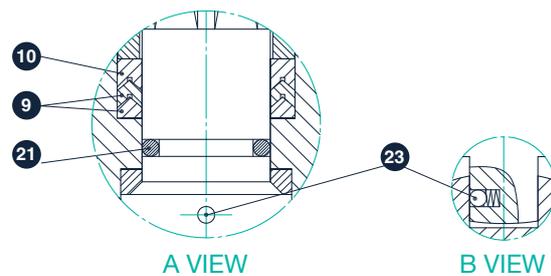


DIMENSIONS(mm)


SIZE	ϕA	B	C	D	D1	D2	ϕI	ϕJ	L	N	ϕP	Q	ϕR	ϕT	W	W1	ϕU	ϕV	ISO5211
1/2"	15	9	139	48.7	7	85	36	42	40.8	4	65	M12	45	82	16	2	6	6	FOR F03 / F04
3/4"	20	9	139	53.7	8	90	36	42	44	4	75	M12	58	98.6	18	2	6	6	FOR F03 / F04
1"	25	11	165	65	12	104	42	50	50	4	85	M12	68	115	18	2	6	7	FOR F04 / F05
1-1/4"	32	11	165	77	11.3	116	42	50	60	4	100	M16	78	140	18	2	6	7	FOR F04 / F05
1-1/2"	38	14	215	85.5	15.5	135	50	70	65	4	110	M16	88	150	18	3	7.5	9	FOR F05 / F07
2"	50	14	215	93	16	142	50	70	80	4	125	M16	102	165	20	3	7.5	9	FOR F05 / F07
2-1/2"	65	17	263	109.7	15.8	168	70	102	110	4	145	M16	122	185	22	3	10	12	FOR F07 / F10
3"	80	17	313	119.5	16	178	70	102	120	8	160	M16	138	200	24	3	10	12	FOR F07 / F10

CONSTRUCTION-BILL OF MATERIAL

SERIES F301-20
PN 40
4"

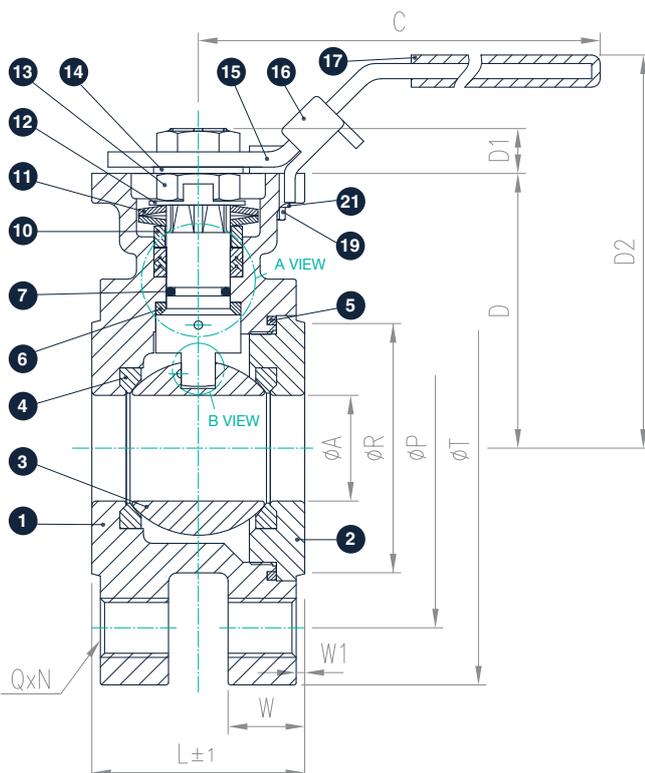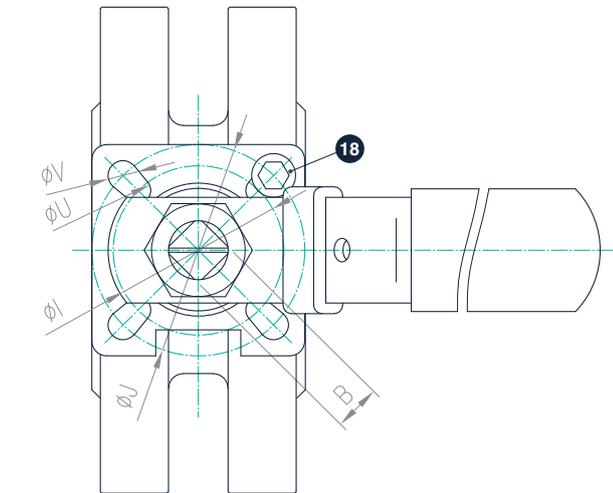

NO.	Parts	Material	Qty
1	Body	1.4408 / 1.0619	1
2	End Cap	4.4408 / 1.0619	1
3	Ball	SS316 / 1.4408	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	1
6	Thrust Washer	RTFE	1
7	Stem	SS316	1
8	Gland Packing	PTFE	3
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Stop Washer	SS304	1
13	Stem Nut	SS304	2
14	Stem Washer	SS304	1
15	Handle	SS304	1
16	Locking Device	SS304	1
17	Handle Cover	PLASTIC	1
18	Stop Pin	SS304	1
19	Pin Nut	SS304	1
20	O-Ring	VITON	1
21	Washer	SS304	1
22	Anti-static Device	SS316	2

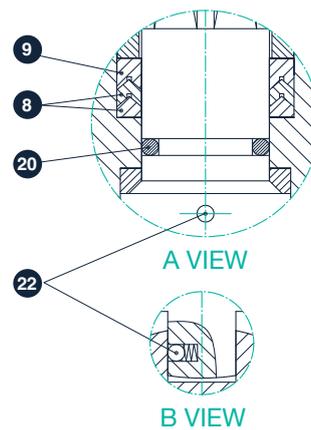


DIMENSIONS(mm)

SIZE	ϕA	B	C	D	D1	D2	ϕI	ϕJ	L	N	ϕP	Q	ϕR	ϕT	W	W1	ϕU	ϕV	ISO5211
4"	100	17	344	132.7	17.8	191	70	102	150	8	190	M20	162	235	24	3	10	12	FOR F07 / F10

CONSTRUCTION-BILL OF MATERIAL

SERIES F301-30
ANSI CLASS 150
1/2" ~ 4"

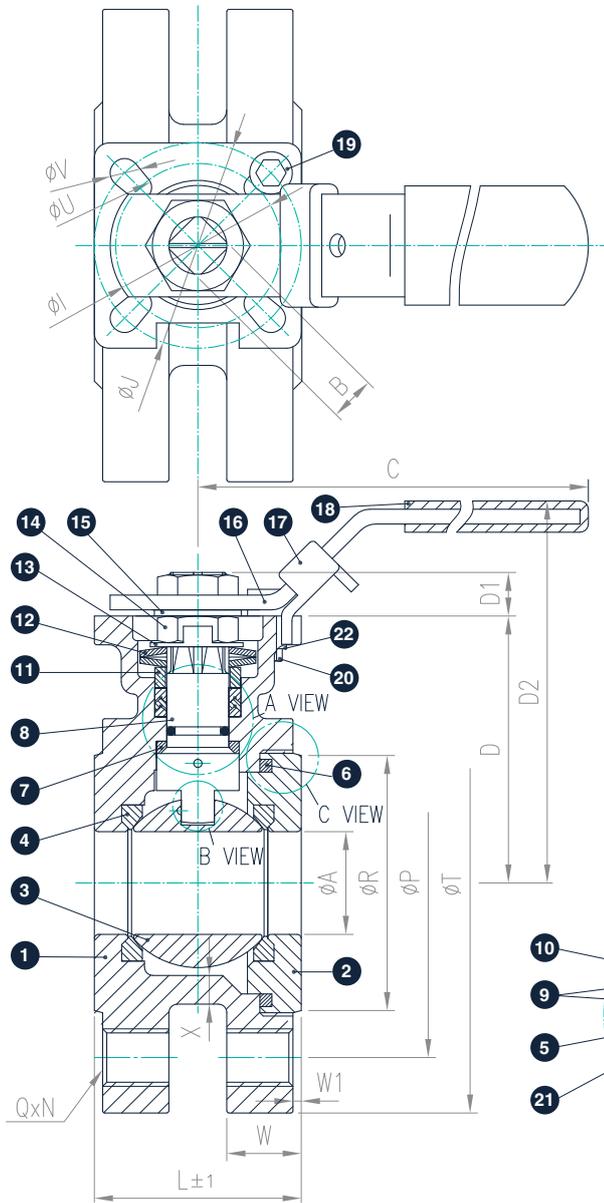

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316 / CF8M	1
4	Seat	PTFE	2
5	Anti-static Device	SS316	2
6	Joint Gasket	PTFE	1
7	Thrust Washer	RTFE	1
8	Stem	SS316	1
9	Gland Packing	PTFE	*
10	Gland Packing	25% GLASS FIBER FILED+PTFE	1
11	Gland Bush	SS304	1
12	Belleville Washer	SS301	2
13	Stop Washer	SS304	1
14	Stem Nut	SS304	2
15	Stem Washer	SS304	1
16	Handle	SS304	1
17	Locking Device	SS304	1
18	Handle Cover	VINYL	1
19	Stop Pin	SS304	1
20	Pin Nut	SS304	1
21	O-Ring	VITON	1
22	Washer	SS304	1


1/2" - 2" (2pcs) , 2-1/2" ~ 4" (3pcs)

DIMENSIONS(mm)


SIZE	ϕA	B	C	D	D1	D2	ϕI	ϕJ	L	N	ϕP	Q	ϕR	ϕT	W	W1	ϕU	ϕV	X	ISO5211
1/2"	15	9	139	48.7	7	85	36	42	40.8	4	60.5	1/2-13NUC	35.1	88.9	11.2	1.6	6	6	7.5	FOR F03 / F04
3/4"	20	9	139	53.7	8	90	36	42	44	4	69.9	1/2-13NUC	42.9	98.6	11.2	1.6	6	6	9	FOR F03 / F04
1"	25	11	165	65	12	104	40	50	50	4	79.2	1/2-13NUC	64	108	11.2	1.6	6	7	7	FOR F04 / F05
1-1/4"	32	11	165	77	11.3	116	40	50	60	4	88.9	1/2-13NUC	63.7	117.3	12.7	1.6	6	7	7	FOR F04 / F05
1-1/2"	38	14	215	85.5	15.5	135	50	70	65	4	98.6	1/2-13NUC	73.2	127	14.3	1.6	7.5	9	5.5	FOR F05 / F07
2"	50	14	215	93	16	142	50	70	80	4	120.7	5/8-11NUC	92.3	152.4	15.9	1.6	7.5	9	6	FOR F05 / F07
2-1/2"	65	17	263	109.7	15.8	168	70	102	110	4	139.7	5/8-11NUC	104.6	177.8	17.6	1.6	10	12	8	FOR F07 / F10
3"	80	17	313	119.5	16	178	70	102	120	4	152.4	5/8-11NUC	127	190.5	18	1.6	10	12	9	FOR F07 / F10
4"	100	17	344	132.7	17.8	191	70	102	150	8	190.5	5/8-11NUC	157.2	228.6	23.9	1.6	10	12	9.2	FOR F07 / F10

CONSTRUCTION-BILL OF MATERIAL

SERIES F301-30
ANSI CLASS 150
5" ~ 6"

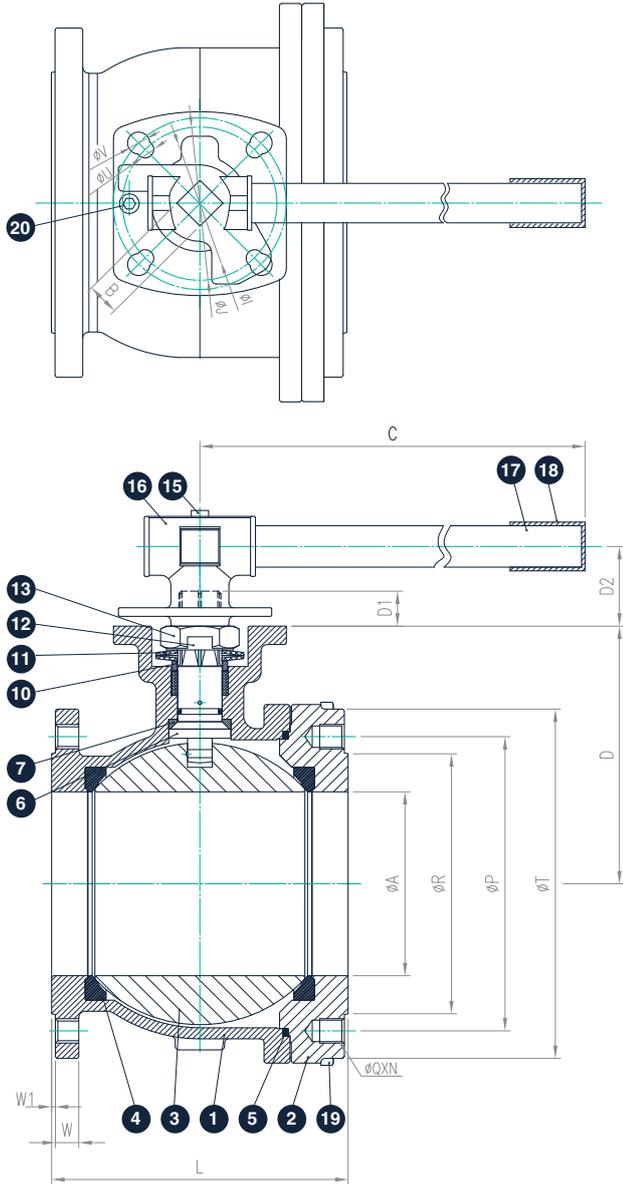

NO.	Parts	Material	Qty
1	Body	CF8M / WCB	1
2	End cap	CF8M / WCB	1
3	Ball	SS316 / CF8M	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	1
6	Stem	SS316	1
7	Thrust Washer	RTFE	1
8	Gland Packing	PTFE	1
9	Gland Packing	25% GLASS FIBER FILED+PTFE	1
10	Gland Bush	SS304	1
11	Belleville Washer	SS301	2
12	Stop Washer	SS304	1
13	Stem Nut	SS304	1
14	O-Ring	VITON	1
15	Handle Screw	SS304	2
16	Handle-A	SS304	1
17	Handle-B	CARBON	1
18	Handle Cover	VINYL	1
19	Bolt	SS304	8
20	Stop Pin	SS304	1
21	Anti-static Device	SS316	2

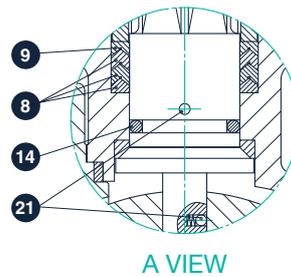

DIMENSIONS(mm)


SIZE	øA	B	C	D	D1	D2	øI	øJ	L	N	øP	øQ	øR	øT	W	W1	øU	øV	ISO5211
5"	125	27	705	192.7	28.5	66.5	125	140	200	8	215.9	3/4-10NUC	185.7	250	22.3	1.6	14	18	FOR F012 / F014
6"	150	27	705	210.2	28.5	66.5	125	140	240	8	241.3	3/4-10NUC	215.9	285	23.8	1.6	14	18	FOR F012 / F014

TECHNICAL DATA | Breakaway torque / Cv and Kv values / Weight


Size	Torque		Cv values	Kv values (M ³ /h)	Weight (Kg)		
	N.m	lbs.in			F301-10	F301-20	F301-30
1/2"	5	44	15	13	2	1.3	1.16
3/4"	7	62	40	34	2.5	2.5	1.48
1"	16	142	70	60	2.76	2.76	1.98
1-1/4"	18	159	110	94	4.12	4.12	2.91
1-1/2"	29	257	250	213	5.22	5.22	3.83
2"	36	319	430	366	7	6.88	6.09
2-1/2"	60	532	700	595	11.85	11.6	11.2
3"	74	656	1100	935	14.9	15	13.4
4"	90	797	2000	1700	19.81	23.57	23.38
5"	221	1958	3700	3145	50.8	-	51.6
6"	234	2073	5400	4590	68.2	-	69.1

TECHNICAL DATA | Pressure - Temperature diagram | 1/2"~ 6"

F301-10 / F301-20
Seat material : PTFE / RTFE

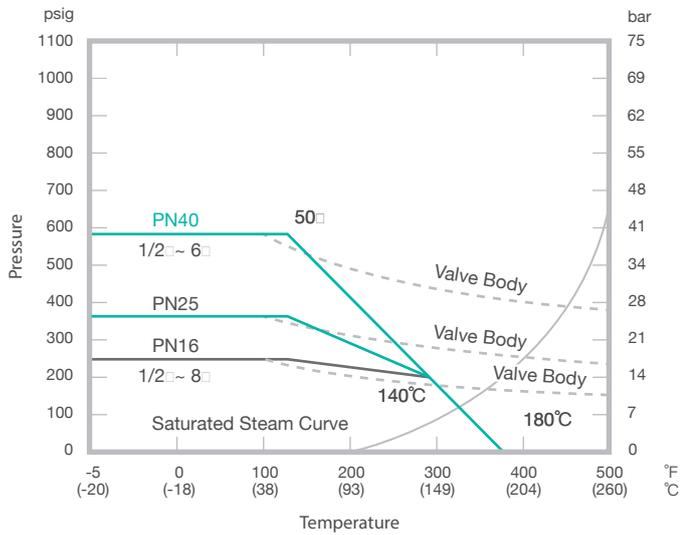

F301-30
Seat material : PTFE / RTFE

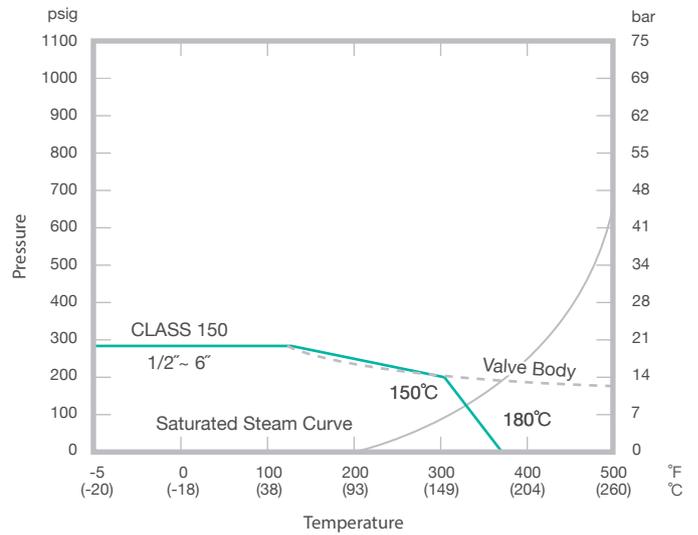

OPTIONAL ACCESSORIES

| Handle options



Oval handle




Economical stem extension




Flat (with / without Spring Return Lock)


| V Port ball

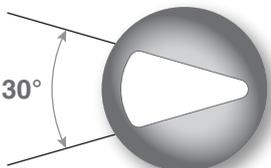

30°

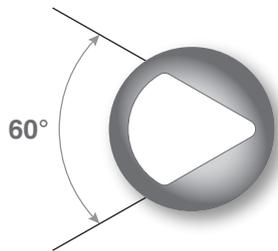

60°

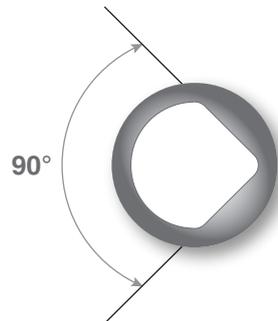

90°

| Accessories



TSM



TSM with Handle



Transworld Steel Enterprise Co., Ltd.

Tel +886 4 2271 6107 **Fax** +886 4 2271 6127

Address No. 34, Gongye 14th Rd., Dali Dist.,
Taichung City, 412038, Taiwan (R.O.C.)



Established in 1992
TAWD has dedicated over 30 years to
manufacturing premium ball valves

INNOVATION

INTEGRITY

STRICT SELECTION